



FILTER KIT

WATER REMOVAL



OILS



DIESEL



GASOLINE



FT007A



FT002




60L



90L



100L

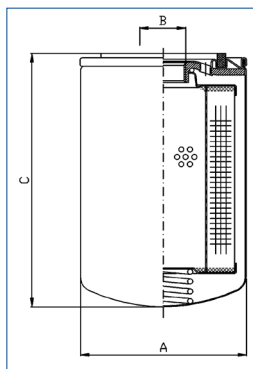

FEATURES

	60L	90L	100L
Filter type	paper + water removal	paper + water removal	paper + water removal
Mesh [μ m]	25	25	25
Max flow rate [l/min / GPM]	60 / 15,85	90 / 23,78	100 / 26,42
Max pressure [bar / psi]	12 / 174	12 / 174	14 / 203
Max/Min Temperature [$^{\circ}$ C]	-25/+120	-25/+120	-25/+120
Gasket material	NBR	NBR	NBR
Allowed fluids	diesel, oil, vegetable oil, gasoline		
Head	FT007A	FT007A	FT002
Inlet/Outlet ["]	1"F flanged / 1" F flanged	1"F flanged / 1" F flanged	1" F / 1" F

DIMENSIONS

	60L	90L	100L
A [mm]	96	96	128
B [mm]	1" UNF	1" UNF	1" - 1/2" UNF
C [mm]	213	213	263

GAUGE FT003 (optional)

- Saturation level indicator
- **BAR** (black line)
- **PSI** (red line)





FILTER KIT

DIRT REMOVAL




OILS



DIESEL



GASOLINE

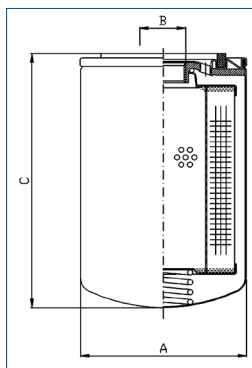**FT007A****100L**

FEATURES

100L dirt removal

Filter type	paper
Mesh [μ m]	10
Max flow rate [l/min / GPM]	100 / 26,42
Max pressure [bar / psi]	12 / 174
Max/Min Temperature [$^{\circ}$ C]	-25/+120
Gasket material	NBR
Allowed fluids	diesel, oil, vegetable oil, gasoline
Head	FT007A
Inlet/Outlet ["]	1"F flanged / 1" F flanged

DIMENSIONI

100L dirt removal

A [mm]	96
B [mm]	3/4" BSP-G
C [mm]	148

GAUGE FT003 (optional)

- Saturation level indicator
- **BAR** (black line)
- **PSI** (red line)

